




NEW PRODUCTS

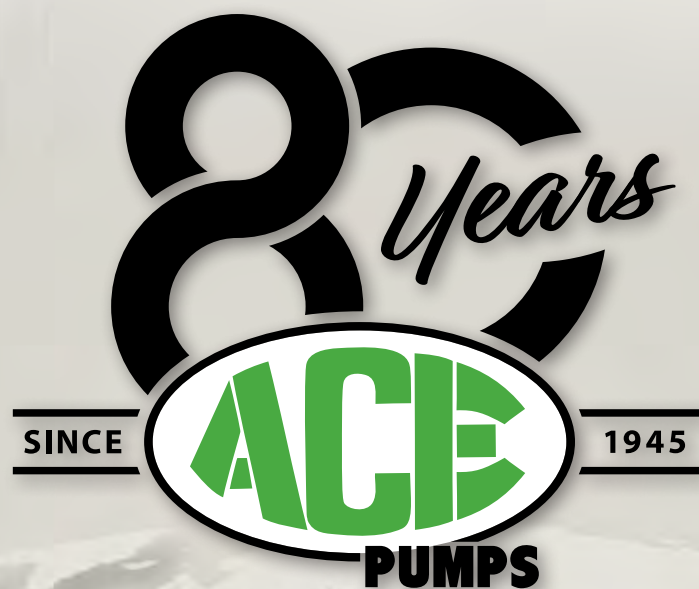

Transfer Pump Features:

- Glass reinforced polyester wet end for corrosion resistance
- Portable with convenient carrying handle
- High flow rates for transfer and filling operations
- EPDM seals and elastomers compatible with a broad range of fertilizers and chemicals
- Stainless steel hardware
- Vertical suction lift to 7.6 meters
- Built in check valve for easy priming
- Close coupled compact design
- Rugged hydraulic motor and drivetrain
- Flanged adapter kits for plumbing convenience

2" TRANSFER PUMPS



Model	GE-200SP-LCT GE-200SP-BSP-LCT	GE-200SP-HONDA GE-200SP-BSP-HONDA	FMC-200SP-HYD-206 FMC-200SP-BSP-HYD-206	FMC-200SP-HYD-306 FMC-200SP-BSP-HYD-306	FLG2X2 FLANGED ADAPTER KIT
Pump Options					2" NPT x 220 full port flange For use with NPT ports
Max Flow	810 LPM	740 LPM	890 LPM	965 LPM	—
Max Pressure	3.9 BAR	4.8 BAR	6 BAR	7 BAR	—

3" TRANSFER PUMPS




Model	GE-300SP-LCT GE-300SP-BSP-LCT	GE-300SP-HONDA GE-300SP-BSP-HONDA	FMC-300SP-HYD-206 FMC-300SP-BSP-HYD-206	FMC-300SP-HYD-306 FMC-300SP-BSP-HYD-306	FLG3X3 FLANGED ADAPTER KIT
Pump Options					3" NPT x 300 full port flange For use with NPT ports
Max Flow	995 LPM	1060 LPM	965 LPM	1220 LPM	—
Max Pressure	3.2 BAR	3.0 BAR	3.7 BAR	6.0 BAR	—

PUMP OPTIONS KEY



British Standard Pipe Thread

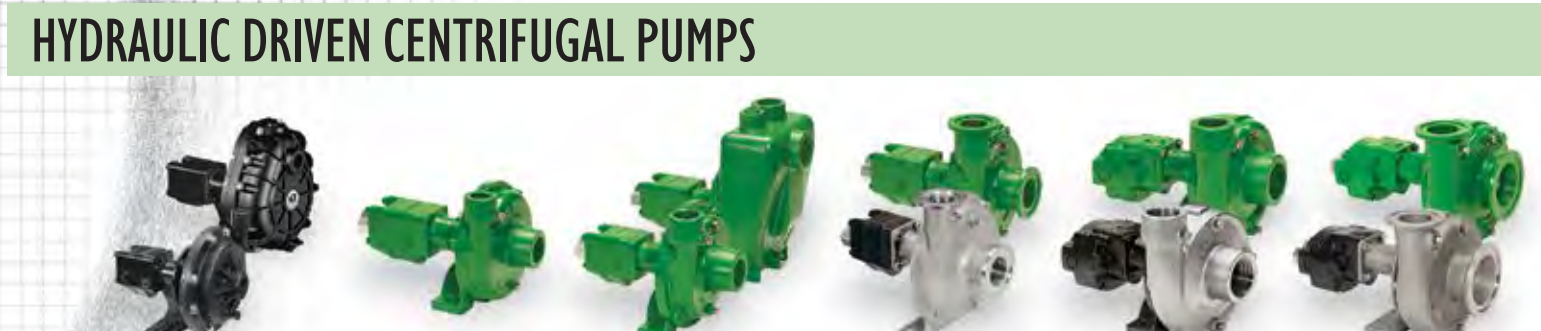HYDRAULIC DRIVEN CENTRIFUGAL PUMPS						PRO 5 SERIES HYDRAULIC DRIVEN CENTRIFUGAL PUMPS												MAX SERIES HYDRAULIC DRIVEN CENTRIFUGAL PUMPS					
																							
Model	FMC-75-HYD-204 FMC-75-HYD-206 FMC-75SP-HYD-204 FMC-75SP-HYD-206		FMC-HYD-202 FMC-HYD-203 FMC-HYD-204	FMC-HYD-206 FMC-HYD-210 FMC-HYD-310	FMC-150-HYD-206 FMC-150SP-HYD-206* *BSP option not available on 150SP model	FMC-150F-HYD-206 FMC-150F-HYD-304 FMC-150FS-HYD-206 FMCSC-155FS-HYD-206	FMC-200-HYD-210 FMC-200-HYD-304 FMC-200-HYD-310 FMC-200SS-HYD-304	FMCSC-205F-HYD-304 FMCSC-205FS-HYD-304	FMCSC-125-HYD-204 FMCSC-125-HYD-206	FMCWS-125-HYD-204 FMCWS-125-HYD-206	FMCSC-155F-HYD-206 FMCSC-155F-HYD-304 FMCSC-155FS-HYD-206 FMCSC-155FS-HYD-304	FMCWS-155F-HYD-206 FMCWS-155F-HYD-304 FMCWS-155FS-HYD-206 FMCWS-155FS-HYD-304	FMCSC-225F-HYD-304 FMCSC-225F-HYD-306	FMCWS-225F-HYD-304 FMCWS-225F-HYD-306	FMCSC-255F-HYD-304 FMCSC-255F-HYD-306 FMCSC-255FS-HYD-304 FMCSC-255FS-HYD-306	FMCWS-255F-HYD-304 FMCWS-255F-HYD-306 FMCWS-255FS-HYD-304 FMCWS-255FS-HYD-306	FMC-650-HYD	FMC-650F-HYD FMC-650FS-HYD	FMCWS-650F-HYD FMCWS-650FS-HYD	FMC-750F-HYD-M22 FMC-750F-HYD-M25 FMC-755FS-HYD-M22 FMC-755FS-HYD-M25	FMC-855F-HYD		
Pump Options																							
Max Flow	102 LPM / 189 LPM for SP		350 LPM	511 LPM / 492 LPM for 150SP	549 LPM / 587 LPM for 304		757 LPM	908 LPM	348 LPM / 416 LPM for 206		348 LPM / 416 LPM for 206	549 LPM / 587 LPM for 304	549 LPM / 587 LPM for 304	833 LPM	833 LPM	984 LPM	984 LPM	530 LPM	643.5 LPM	643.5 LPM	1097 LPM	1306 LPM	
Max Pressure	6.9 BAR / 5.5 BAR for SP		6.9 BAR	8.3 BAR	8.3 BAR / 9 BAR for 304		8.3 BAR / 5.5 BAR for 210	8.3 BAR	8.3 BAR	8.3 BAR	8.3 BAR / 9 BAR for 304	8.3 BAR / 9 BAR for 304	8.3 BAR / 9.0 BAR for 306	8.3 BAR / 9.0 BAR for 306	8.3 BAR / 9.0 BAR for 306	8.3 BAR / 9 BAR for 306	11 BAR	11 BAR	11 BAR	10.3 BAR	10.3 BAR		

PTO DRIVEN CENTRIFUGAL PUMPS			ROLLER PUMPS AND ACCESSORIES						GASOLINE ENGINE DRIVEN CENTRIFUGAL PUMPS						BELT DRIVEN CENTRIFUGAL PUMPS				
																			
Model	PTOC-600 PTOC-1000	PTOC-150-600 PTOC-150F-600 PTOC-150-1000 PTOC-150F-1000	RP-600C RP-600C-R	RP-800C RP-800C-R	TORQUE BAR KIT RP-TBK	QUICK COUPLER BAC-10-RP6-QC BAC-10-RP8-QC	BASE PLATE RP-BP6 RP-BP8	GE-75	GE-85 GE-85SP	GE-100-A	GE-650* GE-660 *CI option is standard on 650 model	GE-800 GE-860	GE-1600	FMC-75SP	FMC FMC-MAG-D	FMC-150 FMC-150-MAG-D	FMC-150F FMC-150FS FMC-150F-MAG-D		
Pump Options			Bulk Pack (60)	Bulk Pack (40)	Safety for PTO mounting	Multispeed for 6 and 21 spline PTO shafts	Mounting plate for engine or belt drive												
Max Flow	246 LPM	378 LPM	83 LPM	85 LPM	—	—	—	95 LPM	91 LPM	189 LPM	416 LPM	530 LPM	1060 LPM	102 LPM	265 LPM	492 LPM	492 LPM		
Max Pressure	5.5 BAR	7.6 BAR	20.7 BAR	20.7 BAR	—	—	—	4.8 BAR	4.5 BAR / 4.1 BAR for SP	3.4 BAR	8.3 BAR	9.7 BAR	8.3 BAR	6.9 BAR	11.7 BAR	9 BAR	9 BAR		

BELT DRIVEN CENTRIFUGAL PUMPS										ELECTRIC MOTOR DRIVEN CENTRIFUGAL PUMPS									
																			
Model	FMC-150SP FMC-150SP-MAG-D	FMC-650 FMC-650F FMC-650FS	FMC-650-MAG-D FMC-650F-MAG-D FMC-650FS-MAG-D	FMCWS-650F FMCWS-650FS FMCWS-650F-MAG-D FMCWS-650FS-MAG-D	FMC-200 FMC-200-MAG-D FMC-200SS-MAG-DX	FMC-CW-75 FMC-CW-75SP	FMC-CW FMC-CW-MAG-D	FMC-CW-150 FMC-CW-150-MAG-D FMC-CW-150-MAG-DX3	FMC-CW-650 FMC-CW-650-MAG-D FMCWS-CW-650 FMCWS-CW-650-MAG-D	FMC-CW-200 FMC-CW-200-MAG-D FMC-CW-200-X	FMC-CW-800 FMC-CW-800-MAG-D	MPH-100 SERIES	MFP-100 SERIES	MPH-125 SERIES	MPH-150 SERIES	MPA-150 SERIES	MPH-200 SERIES		
Pump Options	   	 			  		  	  	  	  									
Max Flow	492 LPM	530 LPM	530 LPM	530 LPM	757 LPM	102 LPM	265 LPM	303 LPM	530 LPM	757 LPM	681 LPM	227 to 322 LPM	136 to 235 LPM	227 to 288 LPM	530 to 693 LPM	473 to 757 LPM	738 to 1,204 LPM		
Max Pressure	9 BAR	11 BAR	11 BAR	11 BAR	8.3 BAR	6.9 BAR	11.7 BAR	8.3 BAR	11 BAR	8.3 BAR	11.7 BAR	1.8 to 3.1 BAR	2.3 to 4.3 BAR	1.8 to 3.2 BAR	1.4 to 3.6 BAR	4.3 to 7.9 BAR	1.3 to 3.5 BAR		

PUMP OPTIONS KEY


-  Severe Duty Silicon Carbide Shaft Seal
-  Cast Iron Impeller
-  Polypropylene Impeller
-  316 Stainless Steel Impeller
-  British Standard Pipe Thread
-  Integrated Hydraulic Control Valve

 Severe Duty Silicon Carbide Shaft Seal
  Cast Iron Impeller
  Polypropylene Impeller
  316 Stainless Steel Impeller
  British Standard Pipe Thread
  Integrated Hydraulic Control Valve

PUMP OPTIONS KEY



**ANNOVI
REVERBERI
GROUP**

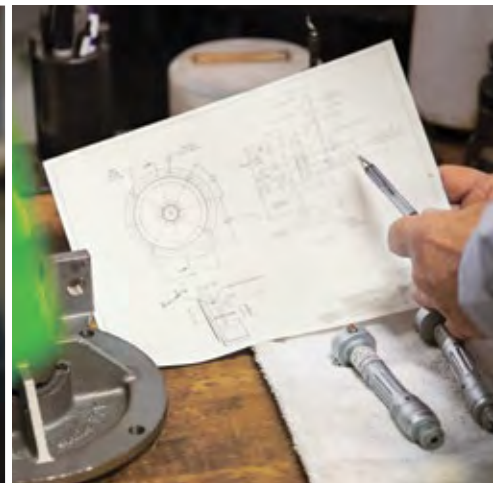

ACE PUMP CORPORATION

P.O. Box 13187

1650 Channel Avenue

Memphis, TN 38113 U.S.A.

+1-901-948-8514

+1-901-774-6147

www.AcePumps.com

international@acepumps.com